


No. CH-18

Unit : mm

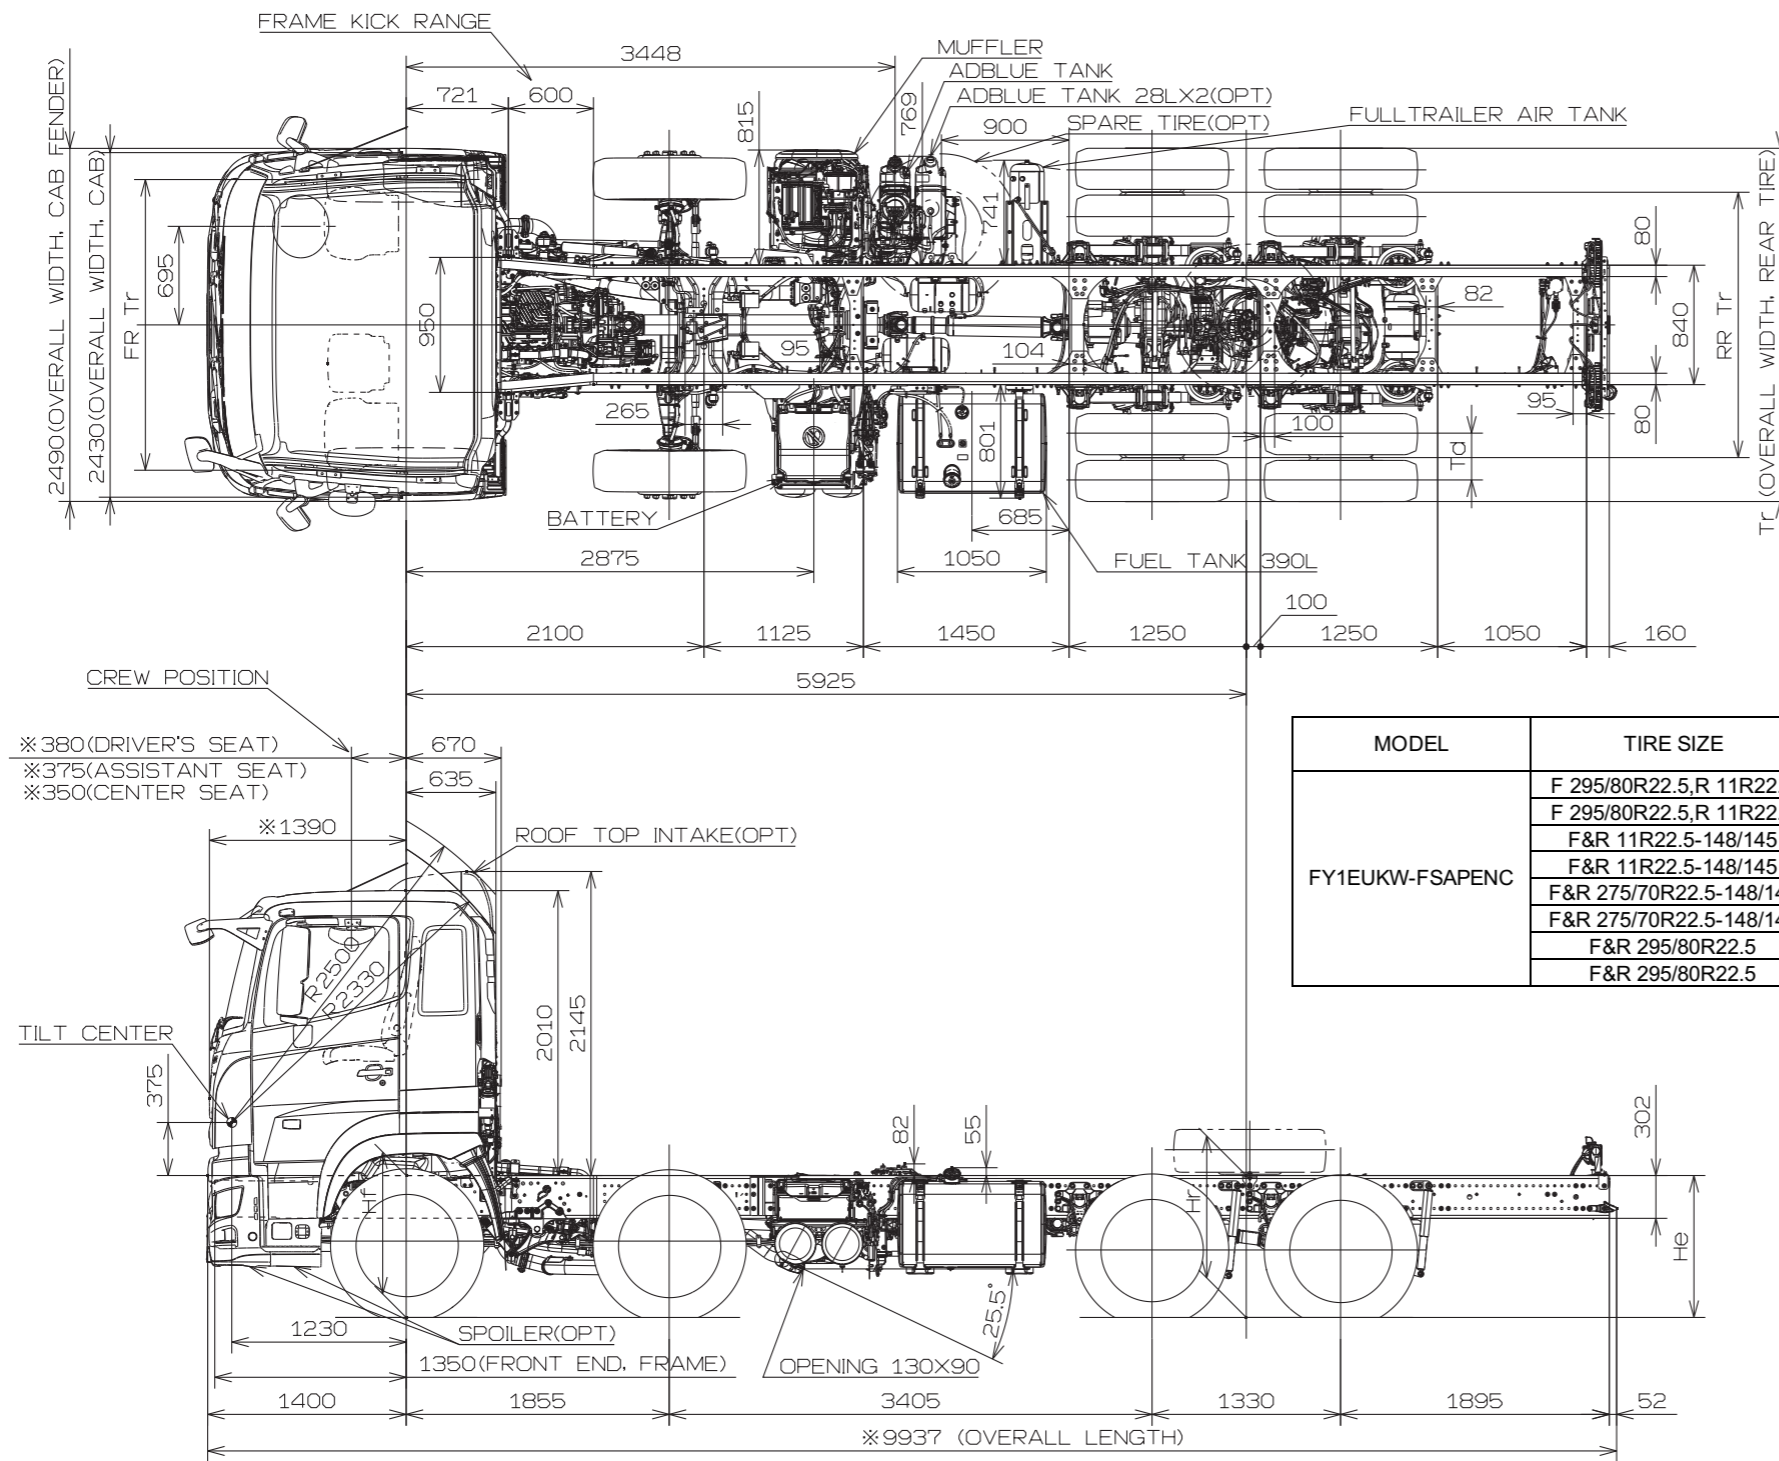

MODEL	TIRE SIZE	DISC SIZE	DIMENSIONS(mm)									
			Hf	Hr	He	A	B	FR Tr	RR Tr	Td	Tr	
FY1EUKW-FSAPENC	F 295/80R22.5,R 11R22.5	F&R 22.5X8.25	1051	1056	1057.7	274	243	2050	1855	330	2466	
	F 295/80R22.5,R 11R22.5	F&R 22.5X8.25 ALLOY	1051	1056	1057.7	274	243	2070	1875	330	2482	
	F&R 11R22.5-148/145	F&R 22.5X8.25	1055	1056	1057.7	278	243	2050	1855	330	2466	
	F&R 11R22.5-148/145	F&R 22.5X8.25 ALLOY	1055	1056	1057.7	278	243	2070	1875	330	2482	
	F&R 275/70R22.5-148/145	F&R 22.5X8.25	1008	1010	1103.7	231	197	2050	1855	330	2463	
	F&R 275/70R22.5-148/145	F&R 22.5X8.25 ALLOY	1008	1010	1103.7	231	197	2070	1875	330	2479	
	F&R 295/80R22.5	F&R 22.5X8.25	1051	1053	1060.7	274	240	2050	1855	330	2463	
	F&R 295/80R22.5	F&R 22.5X8.25 ALLOY	1051	1053	1060.7	274	240	2070	1875	330	2479	

NOTE:1.Figures marked"*"dimensions are measured in parallel with the surface of the ground.
 2.The dimension of tire to be mentioned in above table shows design figure according to JATMA or ETRTO standard.